Murray City Corporation 4646 South 500 West Murray, Utah 84123 Phone 801.270.2440 Fax 801.270.2450



CITY WATER

# Water Specifications & Requirements

Cory Wells, Water Superintendent Joe Goodman, Water Distribution Supervisor Aron Frisk, Field Supervisor Phone 801.270.2440

Amended January 2021

**Murray City Water Division** 



# **Table Of Contents**



Pre Construction	2
Construction	
Water System Design	
Material Specifications	
Pipe	5
Fittings	5
Mechanical Joint Restraint Followers	5
Wrap	5
Tape	5
Grease	5
Ductile Tapping Sleeve	5
Steel Tapping Sleeves	5
Valves	5
Valve Boxes.	5
Valve Box Aligner	5
	5
Fire Hydrants	5
Sampling Station	
Service Line.	6
Service Fittings	6
Corporation Stops	6
Saddles	6
1" Meter Setters	6
1 ½" & 2" Meter Setters	6
<sup>3</sup> / <sub>4</sub> " & 1" Meter Box	6
1 ½" & 2" Meter Box	6
Meter Rings & Lids	6
Larger Meter Lids	6
Water Meters	6
Installation	7
Ductile Iron Pipe and Fittings	7
Required Method of Pipe Installation	8
Hydrant Installation	9
Hydrant Concrete Pads	9
Hydrant Sectional Drawing	10
Hydrant Bonnet Color Code	10
Valve Installation	11
Water Service Installation	11
Water Service Taps Sectionals	12
Point of Use Sectionals	13
Meter Box Installation	14
3/4" & 1" Meter Box Sectional	14
Meter Box in Concrete Installation	14
1 1/2" & 2" Meter Sectional	15
Meters Larger than 2" Sectional	16
Sampling Station Installation	17
Jack & Bore Requirements	
Trench Backfill Requirements	_
Disinfection & Testing Requirements	
Murray City Water Fees	
Fire Flow Testing Requirements	
Backflow Prevention Requirements	22

# Murray City Water Division reserves the right to change these specifications at any time when deemed appropriate.

# **Pre Construction**

- Prior to installation, all extensions or connections to water mains must be approved in advance by the public services director or designee in accordance with Murray City Code 13.08.190 (Ord. 02-35 § 5).
- Water connection impact fees must be paid prior to new development which includes remodeling, building
  enlargement, or any other construction or improvement which will place an increased burden on the city water
  system in accordance with Murray City Code 13.08.050 (Ord. 02-35 § 5).
- Obtain all street cut permits and any other permits applicable to the work being preformed.
- On mainline pipe jobs a pre construction meeting should be set up by the developer. The meeting should include the developer, contractors and Murray City personnel who will be involved in the project. This meeting is generally beneficial for all parties involved.

# Construction

- Murray City will be given advance notification of when work is to begin.
- It is unlawful for any person, without authority, to open any valve or other fixture attached to the city waterworks system in accordance with Murray City Code 13.08.040 (Ord. 02-35 § 5).
- Murray City personnel will inspect all work being performed and nothing shall be buried until approved by an
  authorized inspector. Murray City maps all new construction with a global positioning system (GPS) and if water
  features are buried before they are documented or inspected you will be asked to uncover them.
- Murray personnel may also require extended range ball markers be installed to help with future locating. These ball markers will be provided by Murray City Water.
- All testing shall be overseen by Murray City personnel, no waterline will be accepted into the system until all tests
  have been completed. A complete disinfection and testing requirements checklist has been provided in this manual.
- Any time water will be shut off, it is the contractors job to give a minimum of 24 hours advanced notification to all
  those who will be affected. This notification should include: Contractors name and telephone number, the date the
  water will be shut off, and approximate time that the water will be shut off and turned back on.

# **Water System Design**

### Minimum Water Main Size



- \* Murray City requires that all new water main lines be a minimum of eight inches in diameter. Larger diameter main lines may be required based on flow demands and pressure requirements in accordance with the Murray City Water Master Plan.
- \* Fire hydrant laterals shall be six inches in diameter.

### Fire Protection


- \* Fire hydrants shall be installed at locations determined by the City Fire and Public Works Departments.
- \* Hydrant spacing shall meet the requirements of appendix C of the International Fire Code (IFC).
- \* No dwelling unit shall be located farther than 250' from a fire hydrant, measured along the curb. Murray City Code 13.16.020.
- \* Consideration should be taken to place fire hydrants at high points in water system to remove trapped air. If this is not feasible an air relief valve should be installed.
- \* Hydrants should be installed on the short side of the street closest the water main.

### Dead Ends

- All dead-end water mains shall be equipped with a fire hydrant.
- \* If thrust blocks are unable to be installed, locking gaskets/ joint restraints must be installed for a minimum of 60' or three joints. Water Department Inspector must witness the installation of locking gaskets.

### Valves

- \* A sufficient number of isolation valves shall be provided on mains to minimize inconvenience, sanitary hazards and loss of service during repairs. No more than four valves should be needed to isolate a section of main line.
- \* One valve shall be placed at each branch off of main. A minimum of two valves shall be installed at every tee-intersection and a minimum of three valves at every cross-intersection.
- \* Valves shall be located at not more than 500-foot intervals in commercial districts and not more than 800-foot intervals in other districts. UAC R309-550-5 (8). Valve spacing on transmission mains shall not exceed one mile.
- More valves may be required at Murray City's discretion.

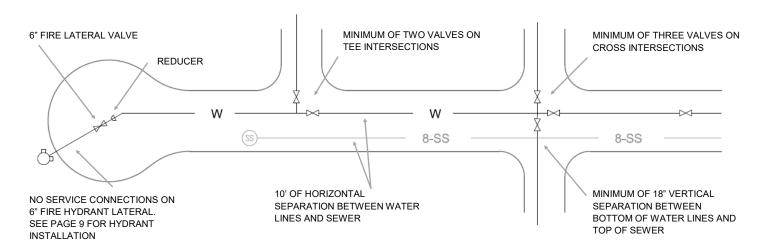

# **Water System Design**



- Separation of Water and Sewer Lines
  - \* Water lines and sewer lines must have a horizontal separation of at least 10 feet, this distance shall be measured edge-to-edge.
  - \* Where local conditions prevent 10 feet of separation, or when water and sewer lines must cross, the bottom of the water line shall be at least 18 inches above the top of the sewer line.
  - \* If the separation requirements listed above cannot be met, the following construction standards shall be used:
    - 1. Sewer lines passing over or under water lines shall be constructed with a solid length of new ductile iron pipe or SD R35 pipe, extending at least 6 feet in both directions of the water line;
    - 2. Approved stainless-steel shear band couplings;
    - 3. Adequate structural support for sewer line to prevent deflection of joints and settling on water line (concrete cradle may be required).
  - \* Anything deviating from these requirements must be approved by Murray City Public Works and the City Engineer.
- Separation of Water lines and all utilities
  - \* Separation of at least 6 inches must be maintained between all utilities when crossing, and at least 4 feet with parallel installation.
- Control Valve Stations
  - \* Any waterline construction involving pressure reducing stations or more than one pressure zone must have an engineered plan taking into consideration the Water System's hydraulic grade line.
- Surface Water Crossings
  - \* All surface water crossings must have engineered plans, approved by Murray City, that meet the standards of UAC R309-550-8 (8)
- Murray City Water System does not allow the use of individual home booster pumps.

# **Material Specifications**

### **Pipe**

Special thickness Class 52 Ductile Iron Pipe (ANSI A21.4/AWWA C151)

Pipe size shall be approved by the Murray City Water Department.



### Pipe Wrap

Polyethylene Encasement (ANSI/AWWA C105/A21.5-99)

All piping should be wrapped with AWWA approved polyethylene encasement.



### **Fittings**

**Ductile Iron** 

Cement Lining and Aspaltic seal coat in accordance with

(ANSI/AWWA C104/A21.4)



### **Tape**

2" Wide 20 Mill Tape

No other type of tape will be allowed.



### **Mechanical Joint Restraint Followers**

Megalug, Stargrip or the use of a suitable equivalent with the approval by Murray City Water Department prior to installation.



### **Grease**

FM Food Quality Grease

Applied to all nuts and bolts



### **Ductile Tapping Sleeves**

It is Murray City policy to use ductile tapping sleeves on ductile iron mains. However, because of our larger water mains an exception may be considered if it can be demonstrated that efforts have been made, or the timing of a project is critical to keep a roadway open or project on schedule. Specific details will be reviewed on a case by case basis.



## **Steel Tapping Sleeves**

PowerSeal stainless steel sleeve (model 3490). Wrapped with Canusa Shrink Wrap or a suitable equivalent.

Steel tapping sleeves are only to be used on steel waterlines unless approved by Murray City.



### **Valves**

Gate: Mueller type resilient seat valves or the use of a suitable equivalent with approval by Murray City Water Department prior to installation.



### **Fire Hydrants**

Mueller A-423 or Super Centurion.



### **Valve Boxes**

Sliding Adjustable type, cast iron, with cast iron cover with the word "WATER" cast into it.



### **Sampling Station**

Kupferle Eclipse #88-SS



### Valve Box Aligner

Posi-Cap valve box aligners are furnished by Murray City but installed by contractor.



### **Electronic Marker Balls**

Murray City provides and installs marker

Note: Contractor assistance may be requested during installation.



# **Material Specifications**

### Type K soft copper tubing with flare fittings

Required from City main line to meter setter.

Recommended from meter setter to point of use.





### **PE 4710 CTS**

Poly tubing is only allowed from the meter setter to the point of use.

Must have an SDR rating of 9 with a 200 psi rating or higher.

Must meet or exceed NSF/ANSI Standards 14 and 61 and meet AWWA C901-17.

Only brass CTS compression fittings will be allowed.

Stainless steel inserts are required on every connection.





### **Corporation Stops**

All corporation stops to be ball valve.

AWWA tapered C.C. threads with flare fittings on 1" direct tap connections.

I.P. threads with flare fittings used with double strap saddles on 1 1/2" and 2" connections.



### 3/4" & 1" Meter Box

Oldcastle Carson

HW-0020-B or HW-0024-B



### **Saddles**

Double Strap Brass Saddles on

1 1/2" and 2" connections.



### 3/4" & 1" Meter Rings & Lids

Cast iron ring that fits the appropriate box.

D & L Supply L-2242 or L-2244

Solid lid with AMR knock-out.



### 1" Meter Setters

1 inch meters must have an 18" copper setter with a ball valve (no backflow).



### 3/4" & 1" Large Meter Lids

Cast iron ring that fits the appropriate box.

D & L Supply B-5020 or B-5024



### 1 1/2" & 2" Meter Setters

1 1/2" and 2" meters must have an 18" copper setter. Double valve, inlet and outlet with lockable bypass valve (no backflow).



### 1 1/2" & 2" Meter Box

4X4 Dura-Crete removable top box without a floor, or a pre approved suitable equivalent.



### **Water Meters**

Murray City provides water meters based on planned flow (Badger Meters).

Note: Murray does not stock larger meters 3" and up, please give Murray City two weeks advance notification to make sure it is available when needed.



### 3" and up Meter Box

3" meters and up must be concrete without a floor and have adequate room for service and maintenance.




### Installation

# **Ductile Iron & Pipe Fittings**



- 1. The contractor shall have all the proper tools to handle the pipe, on the job site with each pipe laying crew.
- 2. Lay pipe and fittings in accordance with the requirements of AWWA C600, except when noted otherwise herein.
- 3. All materials that come in contact with drinking water shall meet ANSI/NSF Standard 61, Drinking Water System Components Health Effects.
- 4. All pipe and fittings shall be thoroughly cleaned before being laid and shall be kept clean until installed.
- 5. Pre-used materials must be approved by Murray personnel and have only been previously used for drinking water. Used materials shall meet all standards, be cleaned and restored to their original condition.
- 6. Pipe should be laid in the dry trench conditions. At no time should water in the trench be allowed to flow into the pipe. At any time that work is not in progress, or the trench is unattended, the end of the pipe shall be suitably closed to prevent the entry of animals, earth, water, etc. using a water tight expandable plug. The expandable plug will always be kept at a close proximity to the end of the pipe incase of an emergency.
- 7. Murray City has a minimum bury depth of 42 inches but prefers pipe to be laid at a depth of 48 inches. Once the excavation has been completed to the proper depth the pipe bed should be prepared as follows:
  - Pipe that is to be laid on undisturbed sub grade should be manually excavated around the pipe bells
    assuring a uniform surface along the pipe barrel. This practice will also assist in applying required tape
    around the bell.
  - Murray City can require that pipe be laid on a bedding material if the native soil is not in ideal condition.
     The bedding material will be sand with no rocks that could puncture the polyethylene wrap.
- 8. Jointing shall conform to manufacturer's instructions and appropriate AWWA standards. Apply lubricant to the exposed surface of the gasket and plain end of the pipe in accordance with the pipe manufacturer's recommendations. Lubricant is furnished in sterile containers, and every effort should be made to protect against contamination.
- 9. All fitting installations should conform to the manufacturer's instructions.
- 10. Murray City requires the use of Mechanical Joint Restraint followers (Megalug, Stargrip or the use of a suitable equivalent with the approval of the Murray City Water Department prior to construction).
- 11. Polyethylene encasement should be installed according to AWWA C105/A21.5-99 (See attached Murray City Required Method of Pipe Installation page 8). Care should be taken to not puncture or tear the wrap. All small rips, tears, and other damage should be repaired using 2" wide 20 mill tape.
- 12. Install concrete thrust blocks at all fittings and other locations, as directed by Murray City Water Department. 6 1/2 Bag Class 4000 is the minimum requirement for all concrete.

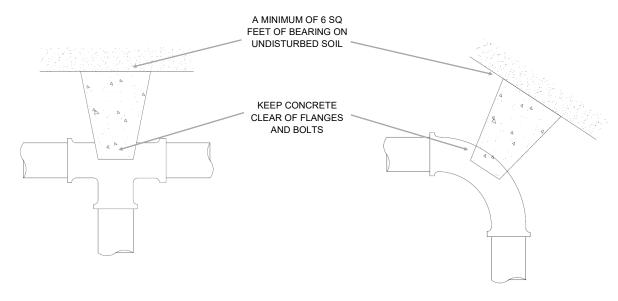



# Murray City's Required Method of Pipe Installation






### STEP 1

Cut a section of polyethylene tube approximately two feet. Overlap the secured tube end with the tube end of the longer than the pipe section. Remove all lumps of clay mud, cinders or other material that might have accumulated on the pipe surface during storage. Slip the poly tube around the pipe, starting at the spigot end. Bunch the tube accordion-fashion on the end of the pipe. Pull back the overhanging end of the tube until it clears the pipe end.



### STEP 2

Dig a shallow bell hole in the trench bottom at the joint location to facilitate installation of polyethylene tube. Lower the pipe into the trench and make up the pipe joint with the preceding section of pipe.



### STEP 3

Move the cable to the bell end of the pipe and lift the pipe slightly to provide enough clearance to easily slide the tube. Spread the tube over the entire barrel of the pipe. Make sure that no dirt or other bedding material becomes trapped between the wrap and the pipe.



### STEP 4

Make the overlap of the polyethylene tube by pulling back the bunched polyethylene from the preceding length of pipe and securing it in place. Murray City requires that polyethylene be secured in place using 2" 20 mill tape.

### STEP 5

new pipe section. Secure the new tube end in place using 2" 20 mill tape.



### STEP 6

Take up the slack in the tube along the barrel of the pipe to make a snug, but not tight, fit. Fold excess polyethylene back over the top of the pipe.




### STEP 7

Secure the folds every three feet along the pipe barrel using 2" 20 mill tape.



### STEP 8

Repair all small rips, tears, or other tube damage with 2" 20 mill tape. If the polyethylene is badly damaged, repair the damaged area with a sheet of polyethylene and seal the edges of the repair with 2" 20 mill tape.



### STEP 9

Carefully backfill the pipe according to the AWWA C600 standard for backfill procedure. To prevent damage during backfilling, allow adequate slack in the tube at the joint.

# **Hydrant Installation**


(Sectional Drawing on Page 10)




Fire hydrants will not be accepted by the City unless all criteria listed below is met.

- 1. Hydrants shall be set at the location shown with a minimum of 1' from the back of curb. Each hydrant shall be set in true vertical alignment. The 4 1/2" steamer nozzle shall face the street.
- 2. Hydrants shall be bedded on a firm foundation; undisturbed soil or solid concrete blocks.
- 3. All nuts and bolts below the finished grade shall be given a heavy coat of FM food quality grease. Everything below the finished grade shall be wrapped completely with 8 mil polyethylene and 20 mil tape appropriately. Polyethylene shall be cut at the bottom to allow drainage from the drain ports.
- 4. Concrete thrust block required from the rear of the hydrant to the end of the trench with a minimum of 6 square feet bearing on undisturbed soil. Entire pipe system must be polyethylene wrapped prior to pouring concrete. Special care must be taken so that concrete does not plug the drain ports. 6 1/2 Bag Class 4000 is the minimum requirement for concrete.
- When there is a bell between an auxiliary valve and a hydrant there must be a locking gasket and blocking installed. Anytime the distance between the auxiliary valve and hydrant is under 17' a solid length of pipe must be installed.
- 6. Where the distance between the main and hydrant is greater than 17', two gate valves may be required (one at main, and one at hydrant). Where gate valves are installed at hydrants, provide a riser such that a standard valve key will clear top of the hydrant.
- 7. During backfill a minimum of 1/2 cubic yard of clean 1 1/2" minus gravel shall be placed around the base of the hydrant to a point 12" above the drain port. Gravel shall be wrapped in geotextile fabric to prevent the migration of fines.
- 8. All work must be inspected by city personnel prior to backfill. No hydrant shall be backfilled until directed by a Murray City Water Division inspector.
- 9. All hydrant bonnets must be painted by the contractor to coincide with the size of the water main serving the hydrant, specifically the larger main in the street not the 6" auxiliary line between the main and the hydrant (See color code on page 10). Must be painted with Sherwin Williams B-54Z Industrial Enamel or equal.
- 10. Concrete pads must be installed around all completed fire hydrants, with 6 1/2 Bag Class 4000 concrete and #4 rebar. When hydrants are installed in an open area the pads are to be 4' X 4' and 8" thick. When hydrants are installed in a park strip the pads are to be 5" thick, 4' wide and run from curb to sidewalk approximately 3 1/2' to 5 1/2'. If the bolts on the hydrant are touching or are in the concrete a hydrant riser must be installed.
- 11. Bury line mark on hydrant shall not be more the 6" above finish grade.
- 12. Contractor shall place and maintain a black plastic bag over new fire hydrants until they are placed in service.

# **Hydrant Concrete Pads**




SECTIONALS FOR HYDRANT PADS		
AREA	SIZE	CONCRETE MIN
OPEN AREA	4' X 4'	8" THICK-6 ½ BG (CLASS 4000)
CURB TO SIDEWALK	5' X 3'	5" THICK-6 ½ BG (CLASS 4000)



# **Hydrant Sectional Drawing**



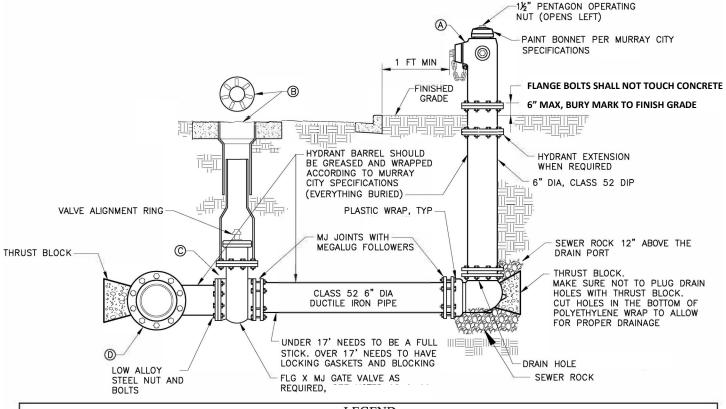

1	LEGEND				
ITEM	DESCRIPTION	PART NUMBER	ITEM	DESCRIPTION	PART NUMBER
(A)	FLANGE OR MJ FIRE HYDRANT AS REQUIRED. PAINT BONNET PER MURRAY CITY SPECIFICATIONS	MUELLER A-423 OR SUPER CENTURION HYDRANT AWWA/ANSI C502 DRY BARREL	0	GATE VALVE WITH 2" X 2" OPERATING NUT	MUELLER 6" RESILIENT SEAT GATE VALVE, OR EQUAL
B	SLIDING ADJUSTABLE VALVE BOX WITH DROP LID WITH THE WORD "WATER" CAST INTO IT	D&L M-8040 OR EQUAL	0	MJ X FLG TEE WITH ACCESSORIES	MJ X FLG TEE ANSI/AWWA C110/AS1.10 WITH 125 POUND FLANGE

- All work and materials to be in accordance with ANSI/AWWA C502 and the APWA general conditions and standard specifications for construction.
- All ductile iron pipe to be in accordance with ANSI/AWWA C115/A21.15 Class 52.
- Gate valves to be in accordance with AWWA C509.
- Standard flange drilling—cast flanges, ANSI/AWWA C110 125/A21.10
- Substitutions to be in accordance with APWA Sec. 01 25 00.

# **Hydrant Bonnet Color Code**

Fire hydrant bonnets shall be color coded to coincide with the size of the water main serving the hydrant.

•	4" and smaller main	White	
•	6" main	Red	
•	8" and 10" main	Orang	e 💮
•	12" or larger main	Green	

### Valve Installation



- 1. All valves should be set in true vertical alignment.
- 2. All nuts and bolts shall be given a heavy coat of FM food quality grease.
- Valves shall be wrapped with polyethylene with only the operating nut exposed. The valve shall be tapped in a way to not infringe on the operation of the valve.
- 4. Murray City may request that a concrete block be placed underneath each valve and wedged tightly to support the weight and prevent slippage.
- 5. Valve boxes of the sliding adjustable type must be centered over the nut or the valve so that a valve key can access the nut and open and close it smoothly. The contractor is also responsible to make sure all valve boxes are clear of dirt and debris and ready for operation.
- 6. Posi-cap valve box aligners will be provided by Murray City and installed by the contractor on all valves.

### **Water Service Installation**

(Sectional Drawing on Page 12)

- 1. ¾ and 1 inch taps shall be installed using C.C. corps with flare fittings.
  - Corporation stops shall be installed on 3/4 and 1 inch taps at the 2 o'clock or 10 o'clock position. These are direct taps without the use of saddles.
- 2. 1 ½ and 2 inch taps shall be installed using I.P. corps with double strap brass saddles.
  - Corporation stops on 1 1/2 inch and above should be installed at the 3 o'clock or 9 o'clock position.
- 3. All corporation stops should be rotated so that the valve actuator runs parallel with the pipe or in other words the valve actuator is not on the top or bottom but placed on the side (see photo below).
- 4. Do not install corporation stops in the new water main at the time of pipe installation they should be installed later when the service connections are constructed. Service connections shall not be constructed until after pipe has been disinfected and tested.
- 5. Prior to tapping service, cut and remove poly wrap at least 8" from tap site. Use 20 mil tape to fully cover ductile iron pipe and seal both ends of the cut poly wrap. Tap service through the middle of tapped area.
- Corporation stops shall be tightened only sufficiently to be watertight.
- 7. Install type K copper tubing from the corporation stop to the water meter, or to the existing service if performing a changeover.
- 8. Care should be exercised in the placing and laying of copper tubing to be sure that the pipe does not have any kinks and is not installed near any sharp stones that may cause damage to the copper tubing.
- Poly tubing is only allowed from the water to the (Point of Use) building or residence (See sectional on page 13).
   Must be PE 4710 CTS tubing or equivalent with brass fittings and stainless steel stiffeners.

### 3/4 and 1 inch taps

10 o'clock



1 1/2 and 2 inch taps

9 o'clock





### 1" Corporation Stop Installation



# **Water Service Taps**



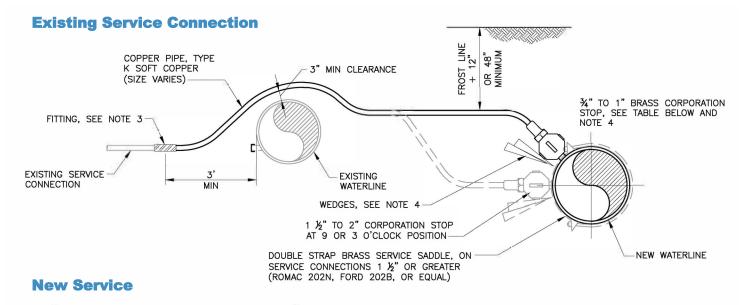

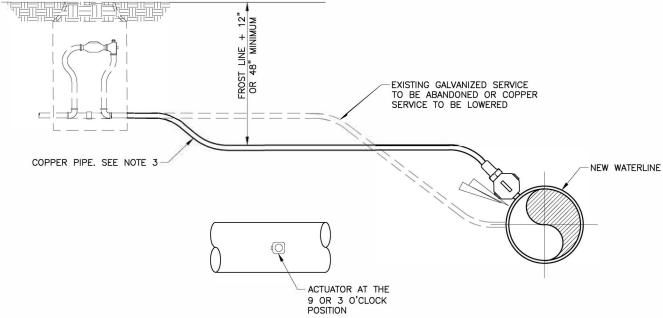


### NOTES:


- FOR EXISTING COPPER SERVICES, DETACH EXISTING SERVICE CONNECTION, EXTEND (USING COPPER SERVICE OF EQUAL SIZE) OR SHORTEN AS NECESSARY, AND RECONNECT TO NEW WATER MAIN, UNLESS NOTED OTHERWISE.
- FOR EXISTING GALVANIZED SERVICES, REPLACE EXISTING SERVICE WITH COPPER SERVICE OF EQUAL SIZE. REPLACE BETWEEN EXISTING METER AND NEW WATER MAIN, INCLUDING REPLACEMENT OF METER, YOKE, AND BOX, UNLESS NOTED OTHERWISE.
- 3. USE COPPER TO COPPER FLARE FITTINGS.
- 4. CONTRACTOR SHALL ROTATE CORPORATION STOP SO THAT VALVE ACTUATOR RUNS PARALLEL WITH PIPE AT THE 9 OR 3 O'CLOCK POSITION. REDWOOD OR PRESSURE TREATED WOOD SHIMS SHALL BE PLACED UNDER CORPORATION STOP TO PROVIDE SUPPORT DURING BACKFILLING.
- 5. ALL NEW SERVICES SHALL BE A MINIMUM OF 1".  $\frac{3}{4}$ " CONNECTIONS SHALL ONLY BE USED FOR RECONNECTED SERVICES.

	CORP STOP					
	TABLE					
	¾"	OR	1"	1½"	OR	2"
	MUELLER MUELLER					
	H-15000 B-25000 (OR EQUAL) (OR EQUAL)		00			
J	(OR	EQU	AL)	(OK	EQU	JAL)

# **Point of Use**



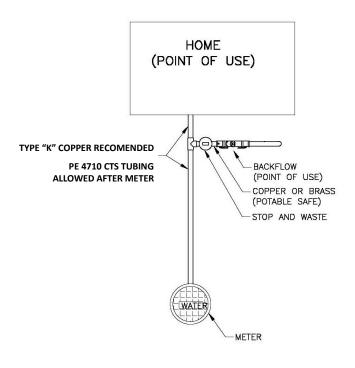

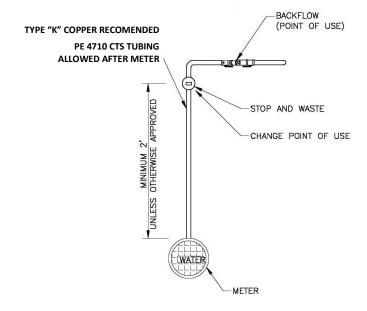


HOME CONNECTION

SPRINKLER/IRRIGATION CONNECTION


### **Meter Box Installation**



- 1. All meters are to be installed in the park strip or within 5 feet of the property line (street side).
- 2. Do not install meter boxes under driveway approaches, sidewalks, in parking lots, or under curb and gutter. Box should be placed in a landscaped area.
- The box shall be set so that the grade of the frame and the cover matches the grade of the surrounding surface.
- Larger ring and lid may be deemed necessary by Murray City personnel in a situation where the meter must by placed in an asphalt, concrete or other high traffic area.

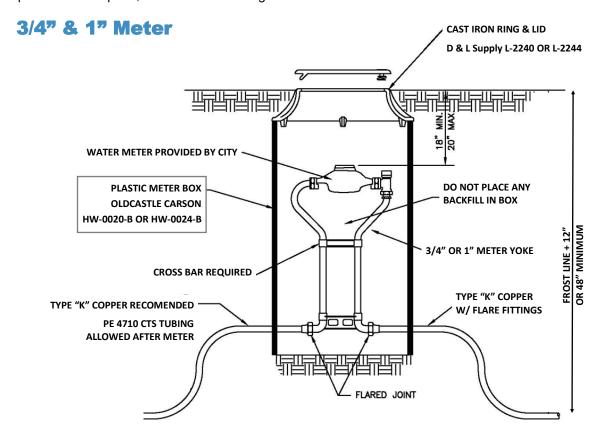


### **Meter Box in Concrete Installation**

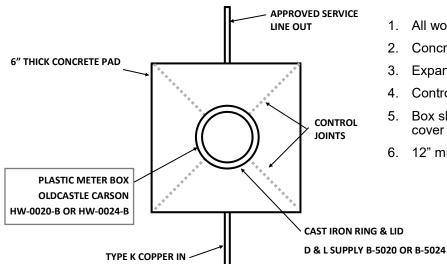

- 1. All work must be inspected by City personnel.
- 2. Concrete shall be 6" thick 6 1/2 Bag Class 4000.
- 3. Expansion board all around.
- 4. Control joints from lid to edge of pad.
- 5. Box shall be set so that the grade of the frame and cover matches the grade of the surrounding surface.
- 6. 12" minimum from lid to edge of concrete.

### 1 1/2" & 2" Meter



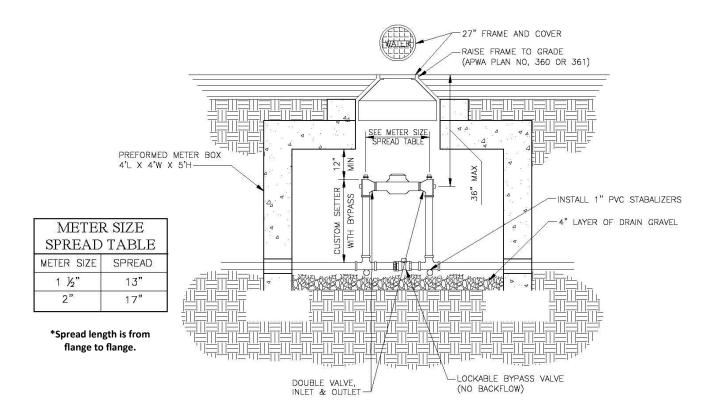


- 1. All work must be inspected by City personnel prior to backfill.
- 2. From the top of the lid to the center line of the meter to be 20" ± 4".
- 3. Center of manhole over meter.
- 4. 6" grade ring where required.
- 5. Allow a 1" clearance around water line where passing through concrete walls. Seal hole with Ram-Nek sealant.
- 6. Minimum depth for water service to be frost line + 12" or 48".
- 7. Turbine meters to be used exclusively for irrigation.
- 8. Murray City to supply water meter.
- 9. Bypass valve to be left in open position until meter set.
- 10. Substitutions: APWA 01 25 00.


# **Meters Larger than 2"**



# 27" FRAME AND COVER LOCATED OVER ACCESS STEPS

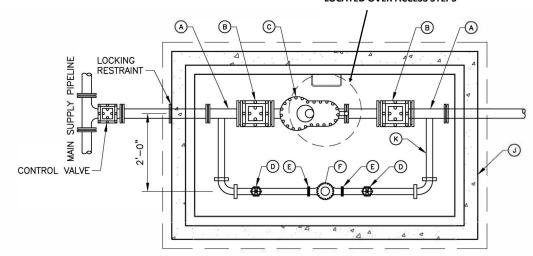

# PLAN VIEW (SCHEMATIC)

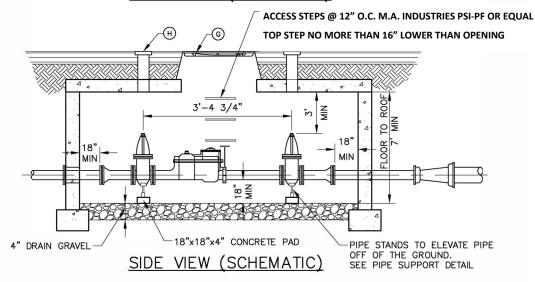


	LEGEND		
No.	*	ITEM	DESCRIPTION
A		3" OR 4" FLANGE X MJ ADAPTER	
B		3" OR 4" GATE VALVE WITH 2" X 2" OPERATING NUT	
©	*	3" OR 4" METER	
0		2" GATE VALVE	
E	2" METER FLANGE		
(E)	) * 2" DISPLACED METER		
<b>©</b>	© 27" FRAME AND COVER OVER ACCESS STEPS		
Œ	H) TOP SECTION OF VALVE BOX WITH LID		
<b>3</b>	O CONCRETE BOX APWA PLAN NO. 505		
®	BRASS PIPING		

<sup>\*</sup> FURNISHED BY MURRAY CITY




# **Sampling Stations**

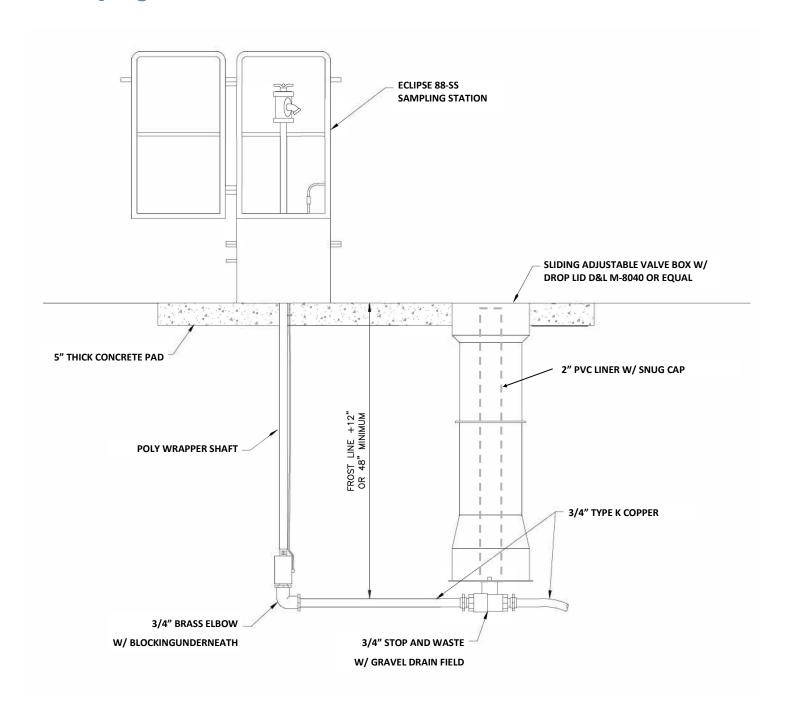

- 1. ¾ inch tap shall be installed using C.C. corp with flare fitting (see water service taps page 9).
- 2. Type K copper tubing must be installed from the water main to the sampling station.
- 3. All connections shall be lead free brass with flared fittings.
- 4. All work must be inspected by a Murray City Water Division inspector prior to being backfilled.
- 5. Bottom of sampling station enclosure needs to be wrapped in 20 mil tape and set in concrete pad for support.



### **Jack & Bore**

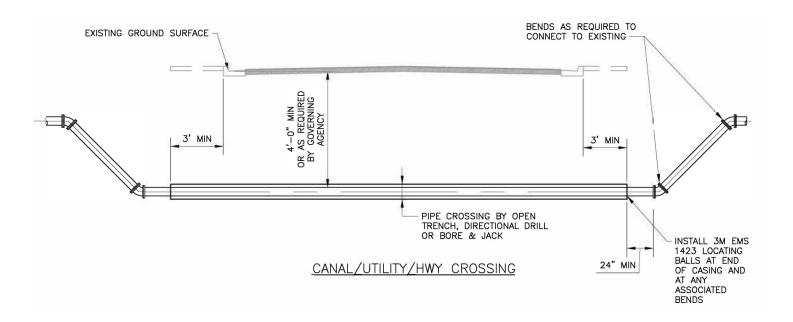


### **NOTES:**

- CARRIER PIPE SHALL HAVE RESTRAINED JOINTS.
- 2. CARRIER PIPE SHALL BE TESTED BEFORE SEALING THE ENDS OF THE CASING.
- 3. SPACERS SHALL BE SECURELY ATTACHED TO CARRIER PIPE PER MANUFACTURER'S REQUIREMENTS.
- 4. CASING PIPE SHALL BE WELDED STEEL, ASTM A53, GRADE B. 42,000 PSI MIN YIELD STRESS. WELD SHALL CONFORM TO AWWA C206
- 5. THE DIAMETER OF THE CASING PIPE SHALL BE AT LEAST THE OUTSIDE DIAMETER OF CARRIER PIPE PLUS 6-INCHES.


MINIMAL WALL THICKNESS OF CASINGS		
DIAMETER WALL THICKNESS		
10" AND UNDER	0.25"	
12"-18"	0.313"	
20"-22"	0.375"	

LARGER CASING AS DIRECTED BY THE CITY

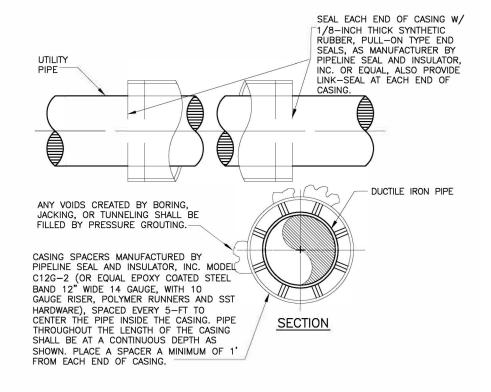

# **Backfill & Compaction Requirements**



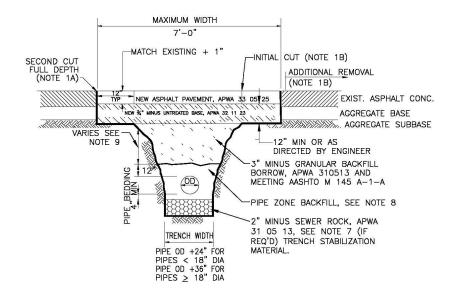

### NOTES:

- ASPHALT PAVEMENT REMOVAL: (REMOVE PAVEMENT AS
  - ASFIRED IN APWA 024114):

    A. MILL OR SAW CUT FULL DEPTH OF ASPHALT TO PROVIDE STRAIGHT VERTICAL PAVEMENT EDGE FOR PAVEMENT REPAIR.

    B. IF A LIP OF GUTTER, A CURB, OR AN EDGE OF THE PAVEMENT IS WITHIN 2—FEET OF THE NEW PATCH, REMOVE EXISTING PAVEMENT TO THE STREET FEATURE. RETAIN AND PROTECT EXISTING CURB AND GUTTER.
- TACK COAT: PROVIDE FULL TACK COAT COVERAGE ON ALL VERTICAL SURFACES.
- JOINT REPAIR: WHERE CRACKS OCCUR BETWEEN THE PATCH AND ANY EXISTING PAVEMENT OR ANY STREET FIXTURE, REPAIR THE CRACK PER APWA 320117.
- TRENCH EXCAVATION IN ACCORDANCE WITH APWA 312316, OSHA, AND UOSH SAFETY STANDARDS.
- ALL BACKFILL PLACED IN TRENCH SHALL MEET SPECIFIED GRADATION AND COMPACTION REQUIREMENTS. NATIVE MATERIAL SHALL BE ALLOWED ONLY IF MEETING THE SPECIFIED GRADATION AND COMPACTION REQUIREMENT AND APPROVED BY THE ENGINEER.
- COMPACT BACKFILL MATERIALS IN ACCORDANCE WITH APWA 330520, 312326, AND UDOT 02721 (AS APPLICABLE). TRENCH BACKFILL IN UDOT RIGHT-OF-WAY SHALL BE COMPACTED TO 97% OR GREATER, MODIFIED STANDARD PROCTOR. TRENCH BACKFILL IN ALL OTHER STREETS SHALL BE COMPACTED TO 95% OR GREATER MODIFIED STANDARD PROCTOR (PER ASTM D 1557).
- ENGINEER MUST APPROVE USE OF TRENCH STABILIZATION MATERIAL. IF TRENCH STABILIZATION MATERIAL IS USED, TRENCH STABILIZATION MATERIAL AND PIPE BEDDING SHALL BE SEPARATED USING GEOTEXTILE MEETING THE REQUIREMENTS OF APWA
- PIPE ZONE MATERIAL SHALL BE SAND MEETING ENGINEER'S APPROVAL (100 PERCENT PASSING 3/8" SCREEN, 35 PERCENT PASSING NO. 4 SCREEN, AND LESS THAN 10 PERCENT PASSING NO. 100 SCREEN) AND CONFORMING TO AASHTO M 145 A-1. PEA GRAVEL AND "SQUEEGY" IS NOT ALLOWED IN ANY PART OF THE PIPE ZONE. MATERIAL SHALL BE PLACED IN LIFT NOT EXCEEDING 8" AND COMPACTED TO A MODIFIED PROCTOR DENSITY OF 95% OR GREATER (PER ASTM 1557) WITHOUT DAMAGING OR DEFLECTING PIPE.
- PROVIDE A MINIMUM OF 4 FEET OF COVER FROM THE TOP OF THE WATER MAIN TO FINISHED GRADE. FOR PIPING THAT CANNOT BE PROVIDED THE MINIMUM COVER, CONTRACTOR TO PROVIDE SPECIAL DESIGN SUBJECT TO THE APPROVAL OF MURRAY CITY.
- 10. PROVIDE AC-20-DM-1/2 ASPHALT CONCRETE UNLESS OTHERWISE DIRECTED BY ENGINEER.
- 11. RECYCLED ASPHALT SHALL NOT BE USED FOR BACKFILL IN ANY PART OF THE TRENCH.
- 12. FOR UNIMPROVED AREAS, PROVIDE NATIVE TOPSOIL FOR THE TOP 12" OF THE EXCAVATION COMPACTED TO 80 PERCENT MODIFIED PROCTOR (ASTM D 698) AND RESTORE PER APWA 32 92 00 OR 32 93 13 (AS APPLICABLE). THE TRENCH ZONE SHALL BE COMPACTED TO 92 PERCENT MODIFIED PROCTOR (PER ASTM D 698). NATIVE MATERIAL MAY BE ALLOWED IN THE TRENCH ZONE IF FREE OF ROCKS LARGER THAN 3" IN DIAMETER.

# **Disinfection & Hydrostatic Testing Requirements**



Murray City Corporation recognizes the American Water Works Association (AWWA) standard C651-05 is widely accepted and recognized within the water industry as the guide to use for main water line disinfection. However, Murray City has found additional safety measures must be observed to protect the water quality within newly constructed water mains.

For the purpose of main water line disinfection, we recommend using one of the methods described in the AWWA standard C651-05. For ease and safety purposes we recommend using a granular type of hypochlorite. However, any of the disinfection methods given would be adequate.

Once a section of pipe has been completed and is ready to be filled the testing process can begin. At this point the following steps should be taken.

- 1. Murray City personnel will slowly fill the section of pipe that is to be tested. Contractors are not to operate valves at any time.
- 2. Once the line has been filled Murray City personnel will take a chlorine residual sample at two different locations. There must be a free chlorine residual greater that 100mg/L to proceed to step 3. If the chlorine residual is less than 100mg/L then steps must be taken to chlorinate the line again before testing can proceed.
- 3. Now the line must remain static for a minimum of 24 hours to allow the disinfection process to take place.
- 4. After the minimum 24 hour period Murray City personnel will again take two chlorine residual samples to verify that the free chlorine residual is greater than 100mg/L. If the residual is still greater than 100mg/L then testing can proceed.
- 5. Now the main can be flushed. While disposing of chlorinated water, care must be taken not to pollute the environment in any way.
- 6. After flushing has been completed Murray City personnel will take a chlorine residual test to make sure the waterline is free from chlorine. If chlorine is present more flushing will be needed. Once the line is chlorine free testing can proceed.
- 7. Murray City personnel can now take the first bacteriological samples. One sample is required for every 800 feet of being put into service. Sample results take a minimum of 24 hours to receive and sometimes longer based on when the sample is received by the lab. If the sample results are negative you may proceed to step 8, if the sample results are positive then additional flushing will be required along with repeat samples, all repeat samples will be at the expense of the contractor.
- 8. Hydrostatic testing shall comply with AWWA Standard C600-17. However, Murray City also requires that a pressure of 200 psi be maintained for two hours. Special care must be taken during the pressure test not to contaminate the water in the main. All components of the pressure test must be supplied by the contractor.
- 9. A second set of bacteriological samples can now be taken from the previous sample points used in step 7. If the sample results return negative the water main will be accepted and put into service. Positive results will result in further testing at the contractors' expense as well as a charges for the water used. Also the contractor will be required to pump in chlorine bleach (T-Chlor, Sodium Hypochlorite) to disinfect the line also at their expense.

# **Murray City Water Impact Fees**

### Effective June 25th, 2018



The Water Impact Fee shall be based on the Water Meter Size serving the property as follows:

Water Meter Size	Impact Fee
1"	\$3,027.20
1 1/2"	\$6,053.27
2"	\$9,685.46
3"	\$21,187.01
4"	\$36,321.88
6"	\$75,669.84
8"	\$108,964.52
10"	\$175,553.89
12"	\$231,515.30

Murray City Water offers hydrant meter rentals and water use to homes during Construction. To sign up for either of these programs please contact us at 801.270.2440

# **Fire Flow Testing**

Fire flow testing is the determination of actual flow conditions within a water system. Murray City does not perform the actual fire flow test but requires Murray City personnel be present during the testing and requires that all results be submitted to Murray City.

- Fire flow test should be arranged in advance with Murray City personnel.
- Murray personnel will open and close all hydrants slowly and fully to prevent a pressure surge. It is unlawful for anyone besides Murray personnel to operate a fire hydrant.
- Special care should be taken to make sure that water from the flow test does not impact traffic or do damage to
  property. Murray City reserves the right to stop the testing process at anytime if personnel believes the test is
  creating a negative environment in any way.
- All results of the fire flow test must be submitted to Murray Water Department through standard mail, email or fax.


Murray Water Department		
Mail	c/o Joe Goodman 4646 South 500 West Murray, Utah 84123-3615	
Email	jgoodman@murray.utah.gov	
Fax	801.270.2450	

# **Backflow Prevention Requirements**



- Whenever Murray Water Department deems a service connection's water usage contributes a sufficient hazard to
  the water supply, an approved backflow prevention assembly shall be installed on the service line of the identified
  consumer's water system, at or near the property line, or immediately inside the building being served; but, in all
  cases, before the first branch line leading off the service line.
- Only RPZs and PVBs are allowed on sprinkler systems.
- No backflow assembly may be installed in the park strip for any reason, and must be a minimum of 2' from any sidewalk.
- Stop and waste valves are not allowed in meter boxes or park strips.
- Backflow device must be tested within ten days of being placed in service.
- Device must be tested annually by a Certified Backflow Tester with results sent to Murray City Water through standard mail, email or fax.

Murray Water Department		
Mail	c/o Water Backflow 4646 South 500 West Murray, Utah 84123-3615	
Email	backflow@murray.utah.gov	
Fax	801.270.2450	





CITY WATER

# urray City Water Department



